


- 0) $A' \rightarrow A \$$
- 1) $A \rightarrow C x A$
- 2) $A \rightarrow \epsilon$
- 3) $B \rightarrow x C y$
- 4) $B \rightarrow x C$
- 5) $C \rightarrow x B x$
- 6) $C \rightarrow z$

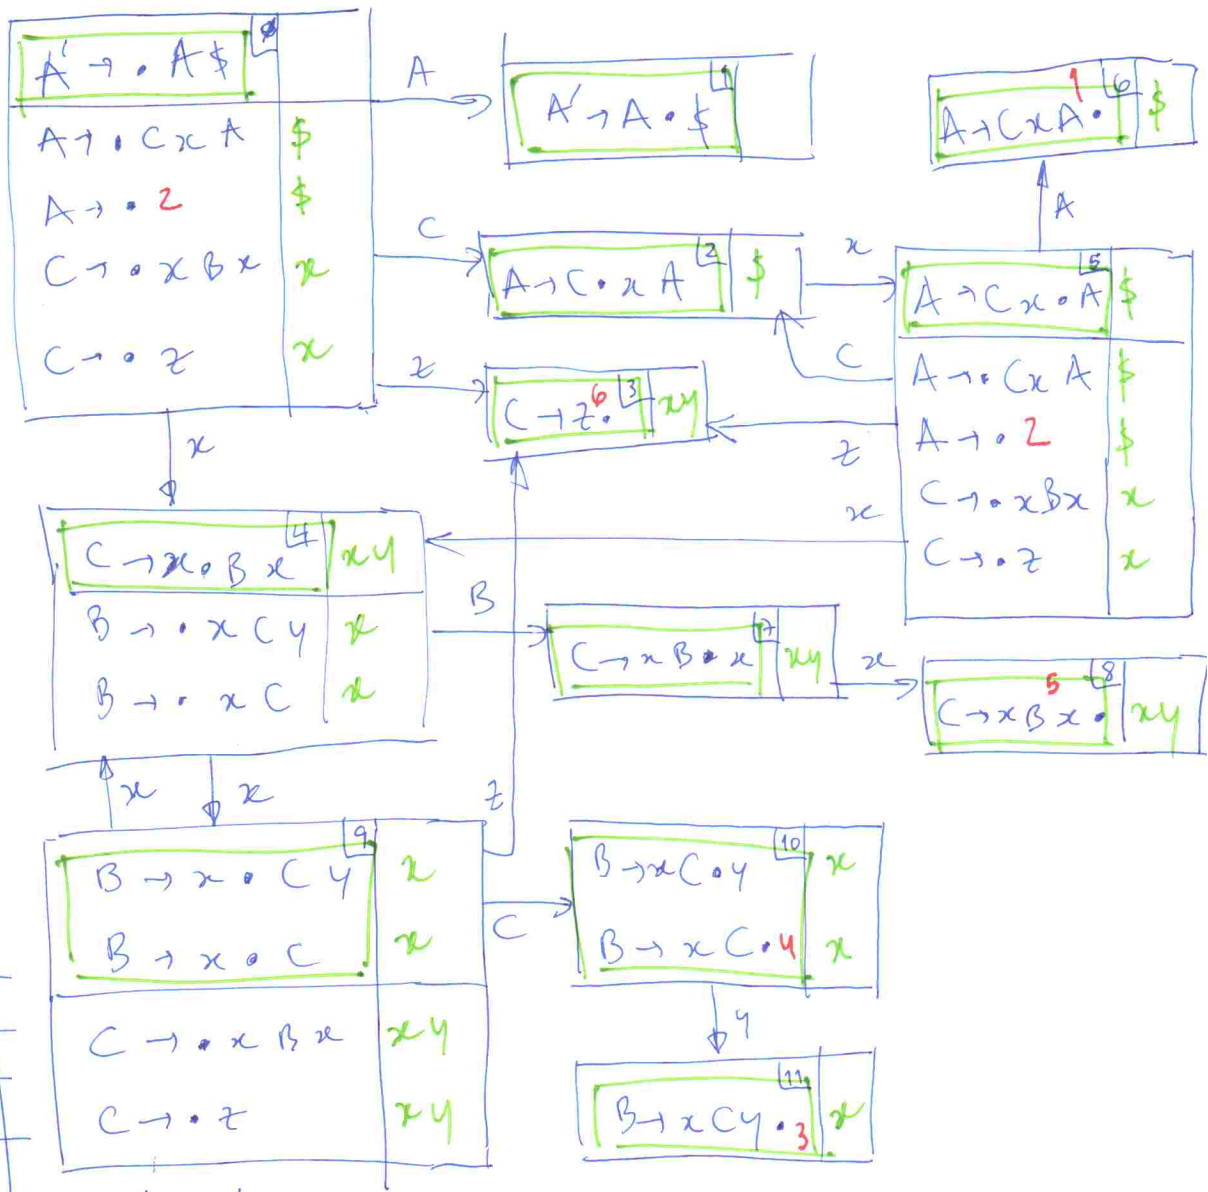

LA LR(1)
SLR(1)
LR(0)

	1st	FL
A	x z ε	\$
B	x	x
C	x z	x y

	x	y	z	\$	A	B	C
0	R2	R2	R2	R2, R2	1		2
1				Acc			
2	5						
3	R6, R6	R6, R6	R6	R6			
4	9					7	
5	R2	R2	R2	R2, R2	6		2
6	R1	R1	R1	R1, R1			
7	8						
8	R5, R5	R5, R5	R5	R5			
9	4		3				10
10	R4, R4	R4	R4	R4			
11	R3, R3	R3	R3	R3			

	x	y	z	\$	A	B	C
0	4		L6	R2	1		2
1				Acc			
2	5						
4	9					7	
5	4		L6	R2	L1		2
7	L5						
9	4		L6				10
10			L3	R4			

RUHA

ENTRADA

ACÇÕES

\$φ	x x z x x	\$	shift 4
\$φ x 4	x z x x	\$	shift 9
\$φ x 4 x 9	z x x	\$	L6
\$φ x 4 x 9 C	x x	\$	goto 10
\$φ x 4 x 9 C 10	x x	\$	74
\$φ x 4 B	x x	\$	goto 7
\$φ x 4 B 7	x x	\$	L5
\$φ C	x	\$	goto 2
\$φ C 2	x	\$	shift 5
\$φ C 2 x 5		\$	R2
\$φ C 2 x 5 A		\$	L1
\$φ A		\$	goto 1
\$φ A 1		\$	ACCEPT